


Development Board

- ❖ The easy way to connect EM3.5L TFT Module for your evaluation and software development (standard header connector 2.54mm pitch)
- ❖ Jumper location for current consumption measurement

CN1			
BB0	1	2	BB1
BB2	3	4	BB3
BB4	5	6	BB5
BB6	7	8	BB7
GG0	9	10	GG1
GG2	11	12	GG3
GG4	13	14	GG5
GG6	15	16	GG7
RR0	17	18	RR1
RR2	19	20	RR3
RR4	21	22	RR5
RR6	23	24	RR7
DEN	25	26	HSYNC
VSYNC	27	28	DOTCLK
VFB	29	30	DRV
RESB	31	32	CSB
SCK	33	34	SDI
VCC_IN	35	36	VSS
DCLK_T	37	38	/CS_T
DIN_T	39	40	BUSY_T
DOU_T	41	42	/PENIRQ_T
VCC_T_IN	43	44	VBAT_T
VBL+	45	46	VBL-
	47	48	

Header 2-4X2

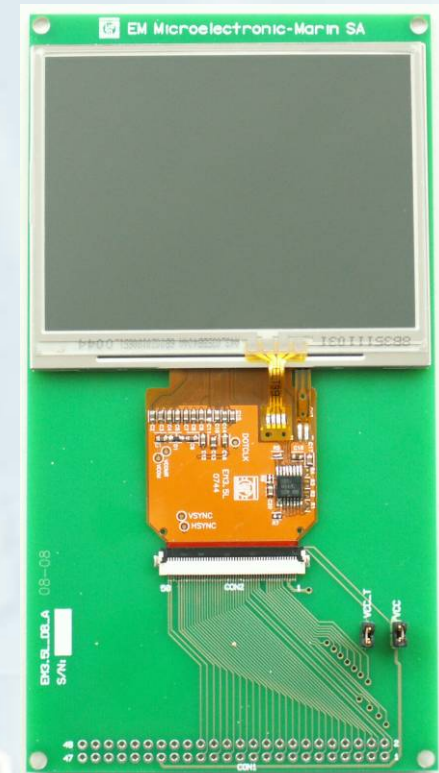

Development Board

(TFT module not included)

Pin out Table